

### DO NOT Install near overhead power lines!

**Step 1:** Please remove all parts from boxes & separate pieces. Roof Stand assembly & pieces are listed in Step 3.


**You will need:**

- Stackable Poles
- Bungee Cord
- Flag



**Step 2:** Assemble poles by placing smaller end into larger end - please see picture below.


**NOTE: This is a stackable pole. It is NOT a telescoping pole**



**Step 3: Roof Stand Assembly**

**You will need:**

- A. Stand Legs (4)
- B. Bearing Pole / Spring
- C. Base Coupler
- D. Hitch Pin (2)
- E. Empty Sand Bag
- F. 25 lbs of sand or pea gravel (not included).




**1.** Start by locating the top & bottom of the coupler.



**2.** Install the long end of the spring on top of the coupler. After installing the spring, place the hitch pin through the hole of the spring assembly to lock it in place.




**3.** Push legs into coupler until the button on the legs clicks into position in the coupler.



**4.** Place the filled sand bag on the stand through the center hole of the sand bag. **The sand bag seams should rest on the legs of the stand. ONLY use the sand bag provided - do NOT use anything else to weight down sand.**




**5.** Place roof stand assembly so that the leg closest to the front of the building & corner of the building is AT LEAST 6ft back from the parapet wall.

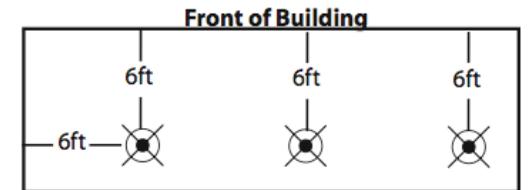

**6.** Place the bearing pole in the spring assembly.



**Step 4:** Slide pole into sleeve on the flag and hold firmly. Hook bungee cord to the tab at the end of the flag sleeve and attach the bungee to the clip on the bottom section of the pole. **Note:** Be certain the tip of the pole is fully inserted into the strengthened TOP END of the flag pole sleeve.



**Bungee Cord Attachment**

**Step 5: FINAL STEP**

Place the pole with the flag attached on to the bearing pole & secure with hitch pins supplied with the pole.



**Secure Closure**

## Completed Adverflag® Classic



**To Disassemble:** Reverse procedure of instructions. When removing the legs from the coupler, use the hitch pin to push the button & release the leg.



Scan our code to view video instructions for your product!



### Questions?

Please call or email  
sales@adverflag.com

P: 800.837.6306 F: 513.588.3737

425 Elliott Ave., Cincinnati, OH 45215  
Monday - Friday 8am to 5pm EST

**ADVERFLAG®**



**OHIO SEARCHLIGHT**

## 20' Classic Installation Instructions Roof Stand Installation



800.837.6306  
sales@adverflag.com

**ADVERFLAG®**